


## XL-TRACE SELF-REGULATING HEATING CABLE

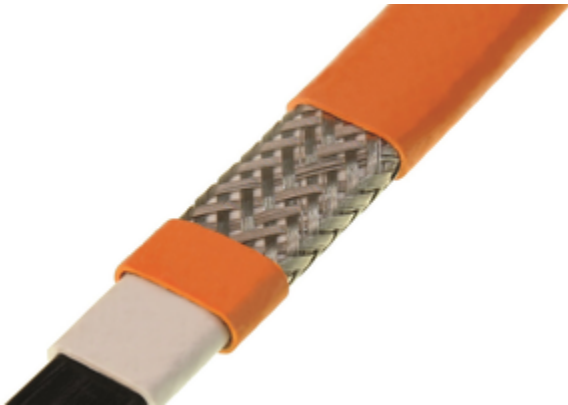

nVent RAYCHEM XL-Trace self-regulating trace heating cables provide energy efficient and easy to use solutions for pipe freeze protection and flow maintenance of grease waste lines (above and below ground) and fuel lines (above ground).

### FEATURES & BENEFITS

Simple to design

Easy to install: cut to length, meter marks, fast RayClic cold connection system

Energy efficient and safe: self-regulating cable, advanced energy saving controls, no cable overheating possible, suitable for plastic pipes

Reliable during long life: 10 year extended product warranty available, maintenance free

### SPECIFICATIONS

**Supply Voltage** 208 – 277 V

**Ground Path Type** Braid

**Min Installation Temperature** Min Installation Temperature imperial °F

Table 1/1

Catalog Number	Item Name	Nominal Power Output @ 40°F, 240V	Outer Jacket Material	Max Circuit Length	Max Continuous Exposure Temperature, Power Off
P000000793	12XL2-CR	12 W/ft	Modified Polyolefin	360 ft	185 °F
858122-000	5XL2-CR	5 W/ft	Modified Polyolefin	490 ft	150 °F

Catalog Number	Item Name	Nominal Power Output @ 40°F, 240V	Outer Jacket Material	Max Circuit Length	Max Continuous Exposure Temperature, Power Off
779713-000	8XL2-CR	8 W/ft	Modified Polyolefin	390 ft	150 °F
P000000794	12XL2-CT	12 W/ft	Fluoropolymer	360 ft	185 °F
622220-000	5XL2-CT	5 W/ft	Fluoropolymer	490 ft	150 °F
485153-000	8XL2-CT	8 W/ft	Fluoropolymer	390 ft	150 °F

**Supply Voltage** 100 – 120 V

**Ground Path Type** Braid

**Min Installation Temperature** Min Installation Temperature imperial °F

Table 1/1

Catalog Number	Item Name	Nominal Power Output @ 40°F, 120V	Outer Jacket Material	Max Circuit Length	Max Continuous Exposure Temperature, Power Off
869218-000	5XL1-CT	5 W/ft	Fluoropolymer	270 ft	150 °F
466981-000	8XL1-CT	8 W/ft	Fluoropolymer	210 ft	150 °F
647494-000	5XL1-CR	5 W/ft	Modified Polyolefin	270 ft	150 °F
535762-000	8XL1-CR	8 W/ft	Modified Polyolefin	210 ft	150 °F

**North America**

Tel +1.800.545.6258  
 Fax +1.800.527.5703  
 thermal.info@nvent.com

**Europe, Middle East, Africa**

Tel +32.16.213.511  
 Fax +32.16.213.604  
 thermal.info@nvent.com

**Asia Pacific**

Tel +86.21.2412.1688  
 Fax +86.21.5426.3167  
 cn.thermal.info@nvent.com

**Latin America**

Tel +1.713.868.4800  
 Fax +1.713.868.2333  
 thermal.info@nvent.com



Our powerful portfolio of brands:  
**nVent.com CADDY ERICO HOFFMAN RAYCHEM SCHROFF TRACER**