


45 Degree Standard Radius (1-1/2" Centerline)



Low pressure and friction loss. Meets SMACNA gauge requirements. Airtight 4-ply lock seam construction. Meets leakage Class 3 for 10" W.G. Duct construction class in a sample test section. Sealant is required only where elbows attach to the duct, saving labor time. Greater structural integrity. 26 ga Galvanized Steel

(Note: 45 degree Elbow pictured)

DIMENSIONS			
(A)	(B)	(C)	Weight
4"	6"	2"	0.77 lbs
5"	7-1/2"	2-3/16"	1.15 lbs
6"	9"	2-3/8"	1.60 lbs
7"	10-1/2"	2-9/16"	2.05 lbs
8"	12"	2-3/4"	2.55 lbs
9"	13-1/2"	2-15/16"	3.11 lbs
10"	15"	3-1/8"	3.72 lbs
12"	18"	3-9/16"	5.37 lbs
14"	21"	3-15/16"	7.02 lbs

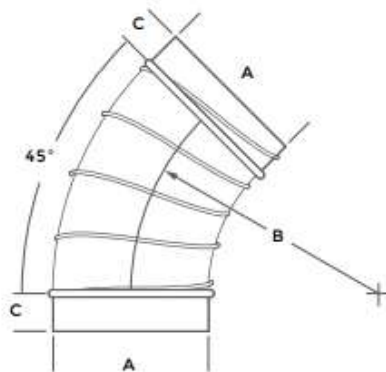

KEY:
 $B/A = 1.5"$
 B = Centerline Radius
 A = Diameter