



Performance+

Duct Wrap for Canada
with ECOSE® Technology

Product Data Sheet

09/2024



Description

Performance+™ Duct Wrap is a thermal and acoustical insulation blanket made from highly resilient, inorganic fiberglass bonded by ECOSE Technology. It is available unfaced, with a foil-scrim-kraft (FSK) jacket and with a white metalized polypropylene-scrim-kraft (PSK) jacket. Vapor retarders provide a 2” (51 mm) staple flange on one edge, and the factory-applied facing assures uniform quality.

Application

- External insulation on commercial or residential heating or air conditioning ducts.
- Suitable for the exterior of rectangular or round sheet metal ducts and spaces or surfaces where temperature and condensation must be controlled

Certifications



Contractor: _____

Job: _____

Date: _____

Specification Compliance

- ASTM C1290
- ASTM C553
 - Type I, Type II - 12 kg/m³ (0.75 PCF)
 - Type I, Type II - 16 kg/m³ (1.0 PCF)
 - Type I, II, III - 24 kg/m³ (1.5 PCF)
- ASTM C1136; Type II
- NFPA 90A and 90B
- California Title 24 (installed at 25% compression)
- UL/ULC Classified
- CAN/ULC S102

Indoor Air Quality

- **asthma & allergy friendly**[®]
- Verified Healthier Air[™]
- UL Environment
 - GREENGUARD Certified
 - GREENGUARD Gold Certified
 - Validated to be Formaldehyde-Free
- Does not contain polybrominated diphenyl ethers (PBDE) such as: Penta – BDE, Octa – BDE or Deca – BDE
- EUCEB Certified

Technical Data


Property (Unit)	Test	Performance
Corrosiveness	ASTM C665	Does not accelerate corrosion of steel
Corrosion	ASTM C1617	Pass
Maximum Service Temperature	ASTM C411	Faced: 250 °F (121 °C), Unfaced: 350 °F (177 °C)
Water Vapor Permeance	ASTM E96, Procedure A	FSK, PSK: 0.02 perms
Mold Growth	ASTM C1338	Pass
Water Vapor Sorption (by weight)	ASTM C1104	5% or less
Surface Burning Characteristics (flame spread/smoke developed)	ASTM E84, UL 723, CAN/ULC S102	UL/ULC Classified FHC 25/50 (Unfaced and FSK facing)
	ASTM E84	25/50 (PSK facing)

Forms Available

Density	Thickness	Width	Length	Facing	R-Value (K Value) @ 75°F Mean Temperature	
					Out-Of Package	Installed [at 25% Compression]
12 kg/m ³ (0.75 PCF)	25 mm (1")	1,219 mm (48")	30.48 m (100')	FSK, PSK, Unfaced	R-3.4 (0.29)	R-2.5 (0.27)
	38 mm (1½")		30.48 m (100')		R-5.1 (0.29)	R-4.2 (0.27)
	51 mm (2")		22.86 m (75')		R-6.8 (0.29)	R-5.6 (0.27)
	56 mm (2¾")		22.86 m (75')		R-7.4 (0.29)	R-6.0 (0.27)
	76 mm (3")		15.24 m (50')		R-10.2 (0.29)	R-8.4 (0.27)
	110 mm (4¾")		13.71 m (45')		R-14.7 (0.29)	R-12 (0.27)
16 kg/m ³ (1.0 PCF)	25 mm (1")	1,219 mm (48")	30.48 m (100')	FSK, PSK, Unfaced	R-3.4 (0.29)	R-2.5 (0.27)
	38 mm (1½")		30.48 m (100')		R-5.6 (0.27)	R-4.5 (0.25)
	51 mm (2")		22.86 m (75')		R-7.4 (0.27)	R-6.0 (0.25)
24 kg/m ³ (1.5 PCF)	38 mm (1½")	1,219 mm (48")	22.86 m (75')	FSK, PSK, Unfaced	R-6.1 (0.24)	R-4.8 (0.23)
	51 mm (2")		15.24 m (50')		R-8.2 (0.24)	R-6.4 (0.23)

Thermal Efficiency | ASTM C177

Mean Temperature	12 kg/m ³ (0.75 PCF)		16 kg/m ³ (1.0 PCF)		24 kg/m ³ (1.5 PCF)	
	k	k (SI)	k	k (SI)	k	k (SI)
50° F (10° C)	0.28	0.040	0.26	0.037	0.23	0.033
75° F (24° C)	0.29	0.042	0.27	0.039	0.24	0.035
100° F (38° C)	0.31	0.045	0.29	0.042	0.26	0.037
125° F (52° C)	0.33	0.048	0.31	0.045	0.28	0.040
150° F (66° C)	0.36	0.052	0.34	0.049	0.31	0.042
175° F (80° C)	0.39	0.056	0.37	0.053	0.33	0.048
200° F (93° C)	0.43	0.063	0.40	0.058	0.36	0.052

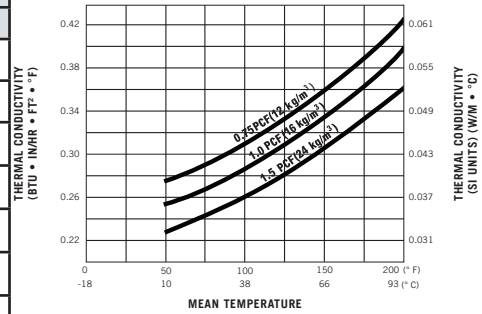

Insertion Loss | Reduction of Sound Transmitted Through Duct Wall (Sound and Vibration Design and Analysis, National Environmental Balancing Bureau, 1994)


Duct Dimensions	Sheet Metal	Duct Wrap		Insertion Loss, dB							
		Nominal Thickness	Nominal Density	63Hz	125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz	
305 mm x 305 mm (12" x 12")	24 GA	38 mm (1½")	12 kg/m ³ (0.75 PCF)	0.6	0.6	0.6	0.7	7.4	14.2	20.9	
610 mm x 305 mm (24" x 12")				0.6	0.6	0.6	0.7	7.4	14.2	20.9	
1219 mm x 305 mm (48" x 12")	22 GA			0.5	0.5	0.5	0.6	7.4	14.1	20.9	
610 mm x 610 mm (24" x 24")				0.5	0.5	0.5	0.6	7.4	14.1	20.9	
610 mm x 305 mm (24" x 12")	26 GA			51 mm (2")	0.8	0.8	0.8	0.8	7.5	14.2	21.0
610 mm x 203 mm (24" x 8")					1.0	1.0	1.0	3.6	10.4	17.1	23.9

Stretch-Outs

Labeled Thickness	Installed Compressed Thickness	Round	Square	Rectangular
25 mm (1")	19 mm (¾")	178 mm (P+7")	152 mm (P+6")	127 mm (P+5")
38 mm (1½")	29 mm (1⅛")	241 mm (P+9½")	203 mm (P+8")	178 mm (P+7")
51 mm (2")	38 mm (1½")	305 mm (P+12")	254 mm (P+10")	203 mm (P+8")
56 mm (2⅜")	42 mm (1⅝")	330 mm (P+13")	279 mm (P+11")	216 mm (P+8½")
76 mm (3")	57 mm (2¼")	432 mm (P+17")	368 mm (P+14½")	292 mm (P+11½")
110 mm (4⅝")	83 mm (3¼")	P+22½" (572 mm)	P+18" (457 mm)	P+19" (483 mm)

P = Perimeter of duct to be installed.

Application

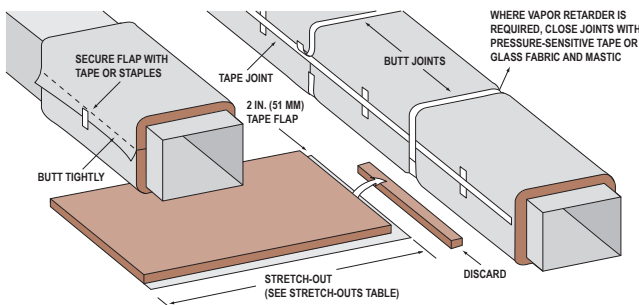

Application and Specification Guidelines

Storage

- Protect stored insulation from water damage, construction damage and other abuse.
- If stored outside, proper protection from weather conditions should be provided.

Preparation

- Install over clean, dry sheet metal ducts.
- All sheet metal joints and seams must be sealed to prevent air leakage from the duct.

Application

- Install with facing to the outside to obtain specified R-value using a maximum of 25% compression.
- Butt all insulation joints firmly together. Longitudinal seam of the vapor retarder must be overlapped a minimum of 2" (51 mm). A 2" (51 mm) tab is provided for the circumferential seam and must be overlapped.
- Where vapor retarder performance is necessary, all penetrations, joints, seams and damage to the facing should be sealed with an FSK, PSK or foil tape or glass fabric and mastic prior to system startup.
- Pressure sensitive tapes should be a nominal 3" (76 mm) wide and be applied with moving pressure using an appropriate sealing tool. Staples should be outward clinch and placed approximately 6" (152 mm) on center.
- Closure systems should have a 25/50 F.H.C. per UL 723.
- For rectangular ducts over 24" (610 mm) wide, secure the insulation to the bottom side of the duct with mechanical fasteners spaced on 18" (457 mm) centers to reduce sag. Care should be taken to avoid over-compressing the insulation with the retaining washer.

- The use of bonding adhesive is not recommended for attaching duct wrap to the duct surface. The use of bonding adhesive may restrict duct wrap from expanding to full thickness. This loss of thickness will result in decreased thermal performance which may lead to condensation issues on below ambient ductwork. Use of bonding adhesive voids warranty and performance claims and potentially the UL rating of Knauf Insulation duct wrap.
- Unfaced Duct Wrap should be overlapped with a minimum of 2" (51 mm) and fastened with 4" (102 mm) to 6" (152 mm) nails or skewers placed 4" (102 mm) apart, or secured with a wire or banding system. Care must be taken to avoid damaging the duct wrap. Refer to diagram for staple stitching and butt-joint method.

Installation Procedures

- Use the Application graphic to determine stretch-outs required for the nominal thickness of insulation to limit average compression of the insulation 25% or less.

Fiberglass and Mold

Fiberglass insulation will not sustain mold growth. However, mold can grow on almost any material when it becomes wet and contaminated. Carefully inspect any insulation that has been exposed to water. If it shows any sign of mold, it must be discarded. If the material is wet but shows no evidence of mold, it should be dried rapidly and thoroughly. If it shows signs of facing degradation from wetting, it should be replaced.

Insulation used in direct contact with air streams that provide conditioning to occupied spaces must be discarded if exposed to water

Sustainability

Knauf Insulation products with ECOSE® Technology are made using our patented, bio-based binder – a smarter alternative to the phenol/formaldehyde (PF) binder traditionally used in fiberglass products. The bio-based binder holds our product together, gives the product its unique appearance and makes it formaldehyde-free. All of our products are made from sustainable resources, such as recycled glass and sand. And we're proud to be putting glass bottles back to work rather than into landfills. Our products are made with a minimum of 50% recycled glass—totaling an average of 26 million bottles.

This product is covered by one or more U.S. and/or other patents.

See patent www.knaufnorthamerica.com/patents

© 2024 Knauf Insulation, Inc.

Check with your Knauf Insulation Territory Manager to ensure information is current.

The chemical and physical properties of this product represent average values determined in accordance with accepted test methods. The data is subject to normal manufacturing variations. The data is supplied as a technical service and is subject to change without notice. References to numerical flame spread ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions.

Knauf Insulation, Inc.

One Knauf Drive
Shelbyville, IN 46176

Technical Support

Phone: (317)398-4434 Option 6

info.us@knaufinsulation.com

www.knaufnorthamerica.com